

Patent

Powerful Light

Professional Lamp

High CRI

Stepless Dimming

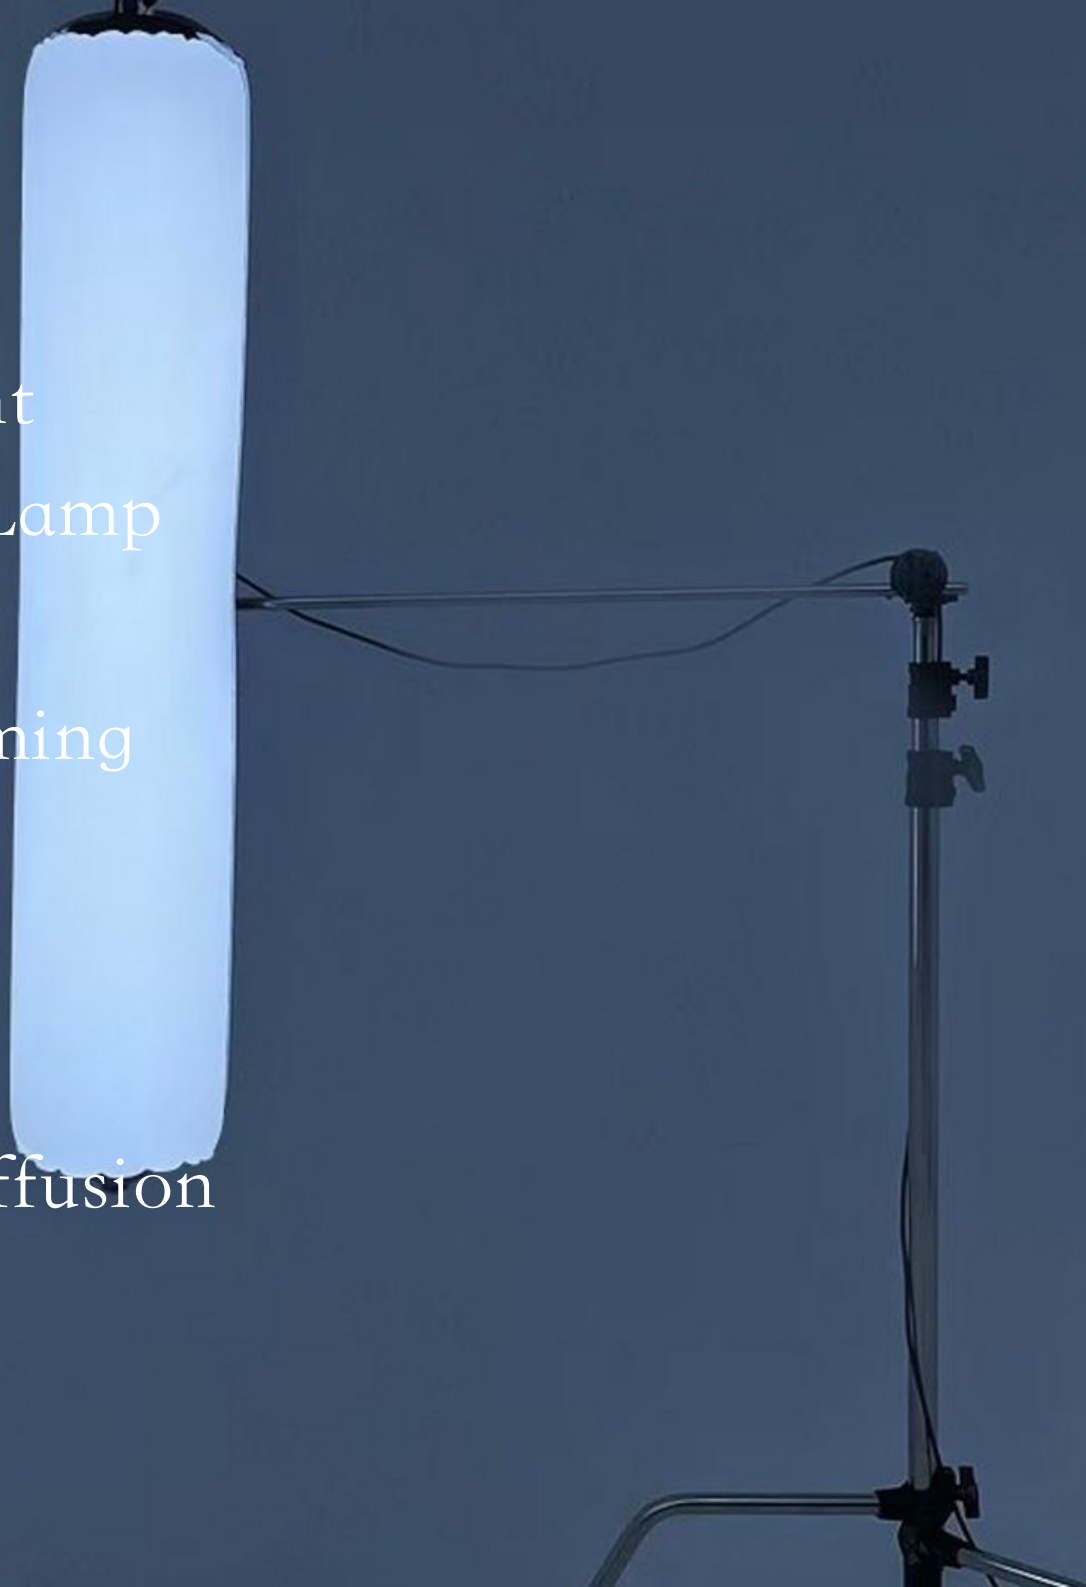
Dmx Control

Waterproof

All Weather

Soft Light-Diffusion

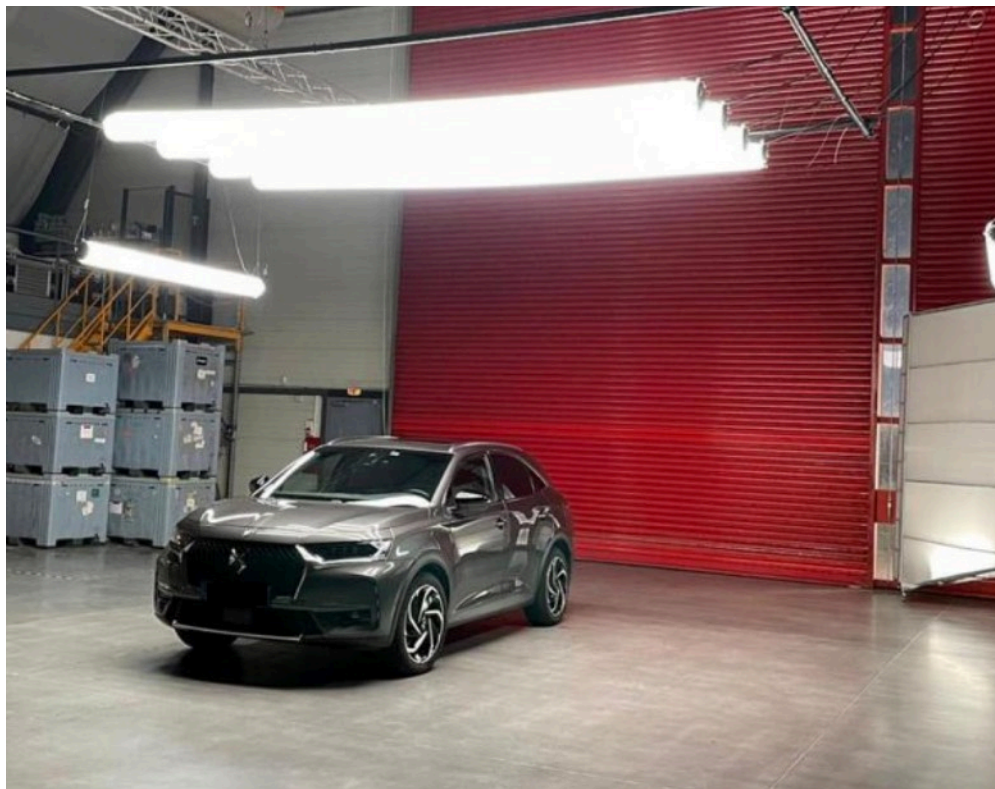
Safety



Airtube Bi14TD - 4ft

Power	100W LED
TLCI	98
Balloon Size: cm	125X22X22cm 4ft
Gross Weight:	9.5 kg
Package	52X42X23cm
Color :	Bicolor

No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	3400	1104	346
2	3200K	4430	1468	448
3	5600K	4970	1728	501
4	6500K	4300	1435	446

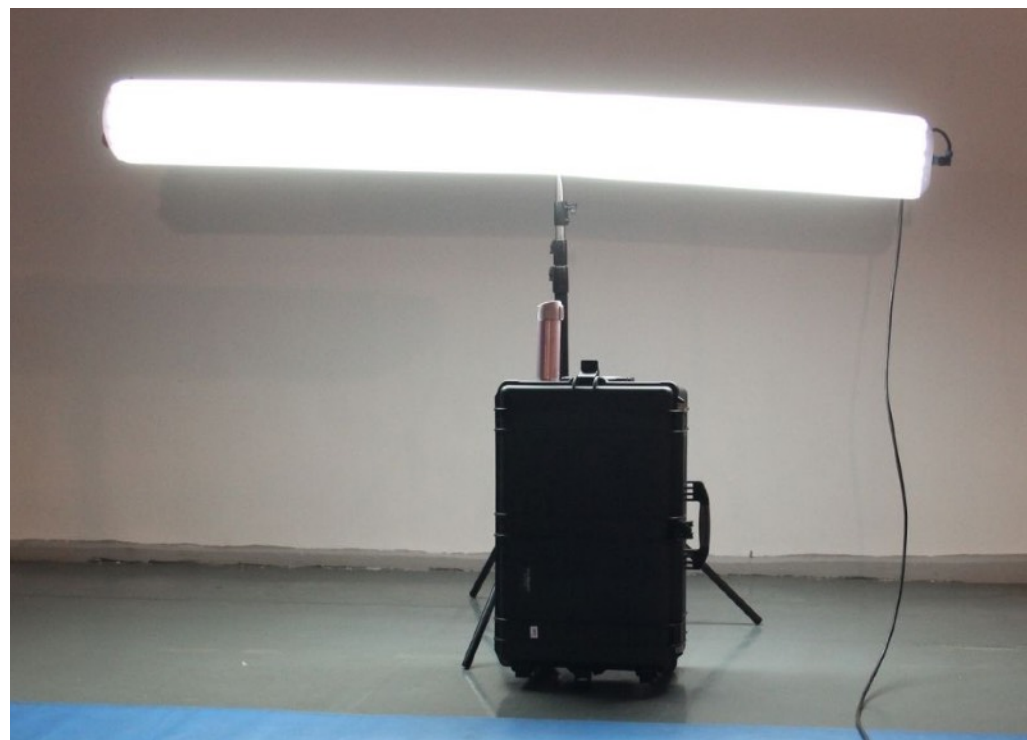
Airtube Bi18TD - 8ft

Power	150W LED
TLCI	98
Balloon Size: cm	250X22X22cm 8ft
Gross Weight:	10 kg
Package	52X42X23cm
Color:	Bicolor





No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	3690	1546	589
2	3200K	4640	1947	695
3	5600K	5150	2220	823
4	6500K	4730	2060	713

Airtube RG14C- 4ft

Power	110W LED
TLCI	98
Balloon Size: cm	125X22X22cm 1X4ft
Gross Weight:	9.5 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Airtube RG18C- 8ft

Power	180W LED
TLCI	98
Balloon Size: cm	250X22X22cm 1X8ft
Gross Weight:	10 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Model	Airtube Bi14TD	Airtube RG14C	Airtube Bi18TD	Airtube RG18C
Model Image				
Lighting				
Lighting Source	BiColor LED	BiColor +RGB LED	BiColor LED	BiColor +RGB LED
Joint Standard	LP16-4	LP16-8	LP16-4	LP16-7
Color Temperature	2700-6500K	2700-20000K	2700-6500K	2700-20000K
Light meter parameters	0.5m f8.05 1m f5.62 2m f2.88	0.5m f8.05 1m f5.62 2m f2.88	0.5m f8.08 1m f5.67 2m f4.06	0.5m f8.08 1m f5.67 2m f4.06
	iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50
Power	100W	110W	150W	180W
Max Power	200W	110W	300W	180W
CRI/TLCI	98	98	98	98
Waterproof	IP 67	IP 67	IP 67	IP 67
Can be Folded	Yes	Yes	Yes	Yes

Balloon				
Dimension	125X22X22cm	125X22X22cm	250X22X22cm	250X22X22cm
Weight	1485 g	860 g	1487 g	943 g
Material	PU Coated	PU Coated	PU Coated	PU Coated
Thickness	0.2mm	0.2mm	0.2mm	0.2mm
Air Valve	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high
Side Skirts	Support	Support	Support	Support
Grids	Including	Including	Including	Including
Airtight	7 Days	7 Days	Support	7 Days
Working Temperature	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree
Control Unit				
Dimension	21.5X16X6.5cm	27X16X6.5cm	21.5X16X6.5cm	27X16X6.5cm
Material	Aviation aluminum	Aviation aluminum	Aviation aluminum	Aviation aluminum
Weight	1485g	1485g	1487g	1530 g
Cable Spec	3X1.5mm	3X1.5mm	3X1.5mm	3X1.5mm
Cable Lenth	7m	7m	7m	7m
Touch Screen	No	No	No	No
Control	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512

Control Function				
Dxm Mode	No	Yes	No	Yes
Dim Curve	No	Yes	No	Yes
Language	English	English Chinese	English	English Chinese
Fan Set		Yes		Yes
Lighting Mode				
CCT Mode	No	Yes	No	Yes
HSI Mode	No	Yes	No	Yes
RGBWY Mode	No	Yes	No	Yes
GEL Mode	No	Yes	No	Yes
CY Mode	No	Yes	No	Yes
FX Mode	No	Yes	No	Yes
Stepless Dimming	0-100%	0-100%	0-100%	0-100%
Power Supply				
Input Voltage	AC:110-220V/	Including	AC:110-220V/	Including
Length	3 m	Including	3 m	Including
V-Battery Connect	DC:16.5		DC:16.5V	

Tripod Stand				
Connection	1k Pin	1k Pin	1k Pin	1k Pin
Safety Case				
Material	Industry Plastic	Industry Plastic	Industry Plastic	Industry Plastic
Dimension external	52X42X23cm	52X42X23cm	52X42X23cm	52X42X23cm
Dimension Internal	48X35X20cm	48X35X20cm	48X35X20cm	48X35X20cm
Weight	4.5 kg	4.5 kg	4.5 kg	4.5 kg
Packing & Weight				
Total Dimension	52X42X23cm	52X42X23cm	52X42X23cm	52X42X23cm
Total Weight	9.5 kg	9.5 kg	10 kg	10 kg
Warrant				
12 month	12 month	12 month	12 month	12 month

Welcome to customize your balloon & brand

Tichuan International Co.,Ltd

Website: <https://www.ti-chuan.com>

Email: contact@ti-chuan.com.cn

Mobile:0086 18626302806

Address: No.29-2 Luou Road,Hudai Industry Park,
Binhu District,Wuxi city 214126

Online:

Skype: forestchina1983

QQ: 718782827

Wechat | Whatsapp: 0086 18626302806

Technical Support:

support@ti-chuan.com

